

SEA-8081

Ai-NET Remote Control Security System

FEATURES

Security Features



Ai-NET Interface
Microprocessor Controlled Main Unit
123db Soft Chirp Siren
Starter Interrupt Relay Included
Valet / Disarm Switch
LED Status Indicator
Superheterodyne Receiver with SAW Technology
Alpine Random Code Technology
Anti-Scan Protection
Code Learning (up to 4 Remotes)
Hood / Trunk Trigger Input
Door Trigger Input
Optional Sensor Input
Ignition Trigger Input
Dual Sector Digital Radar Sensor Included
Dual Stage Impact Sensor Included
Anti-Carjacking Feature
Two Radar Sensor Capability
Selectable Starter Interrupt (NO / NC)
Automatic Rearm (Selectable)
Automatic Relock (Selectable)
Ignition Controlled Door Lock & Unlock
Keyless Entry In Valet Mode

Convenience Features

Full Featured Two or Four Car Operation
Silent Arm (Capable)
Silent Alarming (Capable)
Scan Mode (Capable)
4 EXT Outputs
12 EXT Outputs (with optional SEC-8343)
Programmable EXT Outputs (Pulsed, Continuous, Latched)
Remote Starter Compensation
Dome Light Surveillance Output
On-Board Light Flash Relay
On-Board Door Lock / Unlock Relays
On-Board Dome Light Surveillance Relay
Faulty Sensor Bypass
Tripped Sensor Warning
Tripped Sensor Indication
Last Sensor Recall
Sensor Cancel
Digital Pager Data Output
Pre-warning Output
Alarming Output
Armed Output

Remote Control Features

Two Remote Controls Included
3-Button Remote Control (SEC-8448A)
LCD Remote Control (SEA-8481)
Surface Acoustic Wave (SAW) Technology
Two Way Data Communication
Scrolling System Status Display
Full Time Panic
Protected Valet
Keyless Entry In Valet
Silent Arm (Selectable)
Silent Alarming (Selectable)
Scan Mode (Selectable)
24 Hour Appointment Chime Function
Time / Date Display
Memo Function
EXT Confirmation Labels
Impact Sensor Adjustment
Radar & Impact Sensor Adjustment

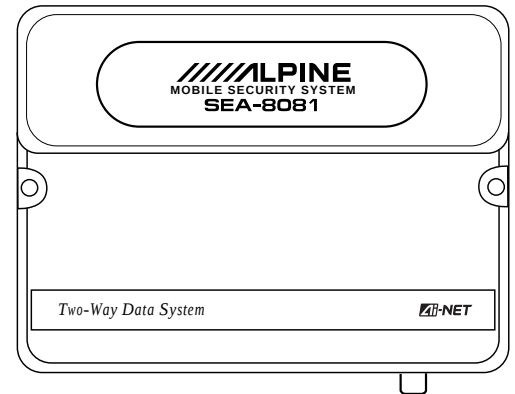

SPECIFICATIONS

Main Unit

Operating Voltage 12V DC(10—16V allowable / negative ground)
Operating Temperature -30°—70°C(-22°—158°F)
Idle Current (armed) 0.2A
Siren Sound Pressure 123dB at 12V DC
Siren (positive) 1.5A
Door Lock / Unlock (selectable) 25A
Dome Light Surveillance (selectable) 5A
Parking Light Flash (selectable) 6A
Starter Interrupt (positive) 0.2A
LED Output (3V positive) 0.02A
Radar Sensor Output (positive) 0.05A
Alarming Output (positive) 0.5A
Pre-Warn Output (negative) 0.2A
Arming Output (negative) 0.2A
Pager Output (digital) 0.02A
Ext 1 / Ext 2 (1second / Latched negative) 0.2A
Ext 3 / Ext 4 (Continuous / 1second negative) 0.2A
Dimensions (WxHxD) 165mmx29mmx125mm(6-1 / 2"x1-1 / 8"x4-15 / 16")

Remote Control

Remote Control Frequency 433.9Mhz
Remote Control Range 100ft(typical)
Battery Type 3V Lithium(CR2025)
Operating Temperature -30°—50°C(-22°—140°F)
Remote Control Dimensions (WxHxD) 43mmx67.5mmx17mm(1-5 / 8"x2-1 / 8"x1 / 2")

SEA-8081

Ai-NET Remote Control Security System

