

SEC-8027A

Remote Control Security System

FEATURES

Security Features



Microprocessor Controlled Main Unit
123db Soft Chirp Siren
Starter Interrupt Relay Included
Valet / Disarm Switch
LED Status Indicator
Superregenerative Receiver
Anti-Scan Protection
Code Learning (up to Four Independent Remotes)
Hood / Trunk Trigger Input
Door Trigger Input
Ignition Trigger Input
Dual Stage Impact Sensor Included
Selectable Starter Interrupt (NO / NC)
Selectable Ignition Controlled Door Lock & Unlock
Keyless Entry In Valet Mode

Convenience Features

Two Car Operation
1 EXT Output
Programmable EXT-1 Output (Pulsed, Continuous)
Dome Light Surveillance or Digital Pager Output
On-Board Light Flash Relay
On-Board Door Lock / Unlock Relays
On-Board Dome Light Surveillance Relay
Faulty Sensor Bypass
Tripped Sensor Warning
Tripped Sensor Indication
Last Sensor Recall
Sensor Cancel
Timed Armed Output (Selectable)

Remote Control Features

Two Remote Controls Included
Two Car Operation (with another 8027A)
Full Time Panic
Keyless Entry In Valet
Impact Sensor Adjustment

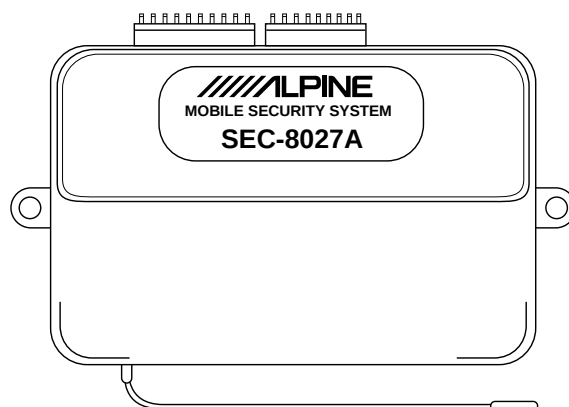

SPECIFICATIONS

Main Unit

Operating Voltage 12V DC(10—16V allowable / negative ground)
Operating Temperature -30°—60°C(-22°—140°F)
Idle Current (armed) 35mA
Siren Sound Pressure 123dB at 12V DC
Output Function (polarity) Current Capacity
Siren (positive) 3A
Door Lock / Unlock (selectable) 25A
Parking Light Flash (selectable) 15A
Starter Interrupt (positive) 0.3A
LED Output (3V positive) 0.02A
Pager Output (digital) 0.02A
Dome Light Surveillance (negative) 0.2A
Ext 1 Output (1second or Continuous [negative]) 0.2A
Dimensions (WxHxD) 135mmx30mmx96mm(5-5 / 16"x1-3 / 16"x3-3 / 4")

Remote Control

Remote Control Frequency 318.5Mhz
Remote Control Range 100ft(typical)
Battery Type 12V Alkaline(MN21 / GP23A / VR22)
Operating Temperature -10°—50°C(+14°—122°F)
Remote Control Dimensions (WxHxD) 53mmx38mmx13mm(2-3 / 4"x1-1 / 2"x1 / 2")

SEC-8027A

Remote Control Security System

