



SEC-8205

Multi-Channel Digital Paging System

FEATURES

General

Selectable Tone / Vibration Mode
Exact Tripped Sensor Indication
Exact Pre-Warn Zone Indication
Exact Faulty Sensor Bypass Indication
Low Battery Indication
Second Receiver Capable (SEC-8405)
"Call A" Convenience Paging
Compatible with any security system (up to two zone violations)

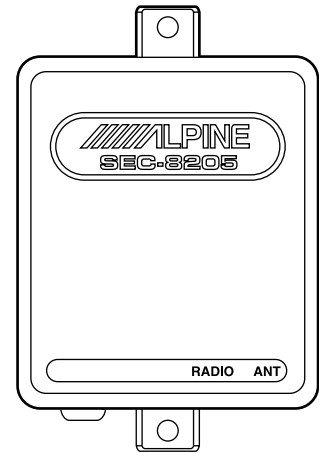

SPECIFICATIONS

Main Unit

Operating Voltage 12V DC(10—16V allowable / negative ground)
Operating Temperature -30°—60°C(-22°—140°F)
Paging Frequency 27MHz
Paging Range 0.5mile
Transmitting Code Combinations..... 16million
Dimensions (WxHxD)..... 100mmx27mmx85mm(3-15 / 16"x1-1 / 16"x3-3 / 4")

Receiver

Battery Type 1—AA Alkaline(1.5V)
Operating Temperature -10°—50°C(+14°—122°F)
Dimensions (WxHxD)..... 45mmx81mmx20mm(1-3 / 4"x3-3 / 16"x3 / 4")

SEC-8205

Multi-Channel Digital Paging System

